




Macro Spacenet & Slide

COR102902

KOMPANI
Let's play

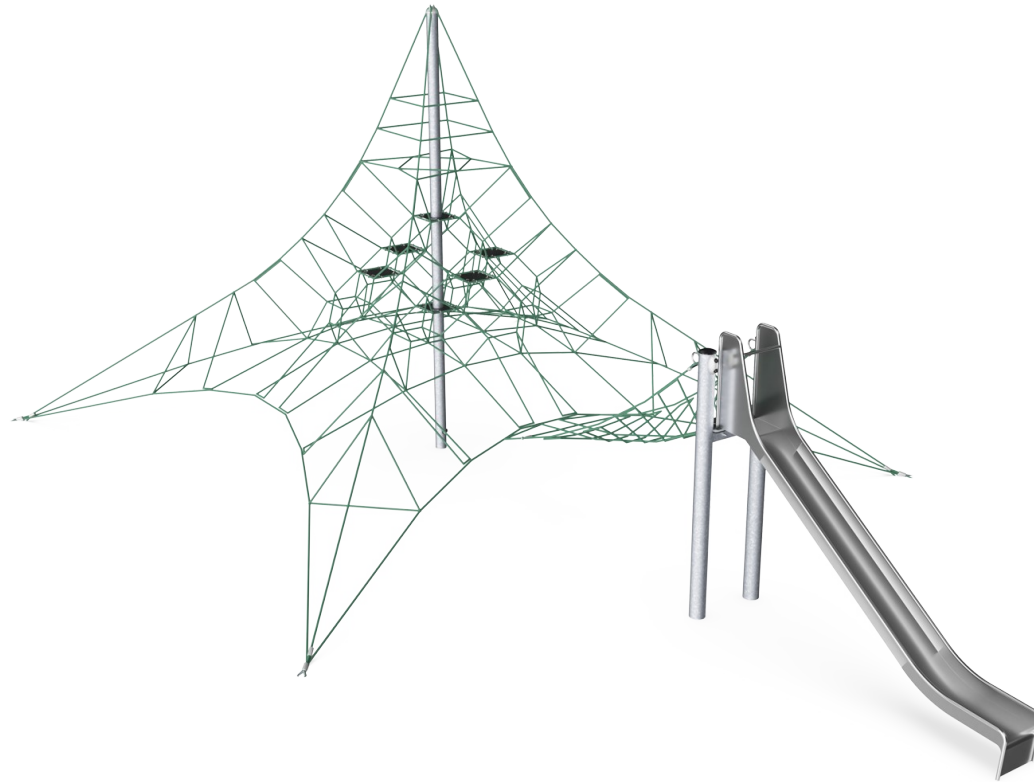

Item no. COR102902-1103	
General Product Information	
Dimensions LxWxH	1296x795x535 cm
Age group	
Play capacity (users)	46
Colour options	

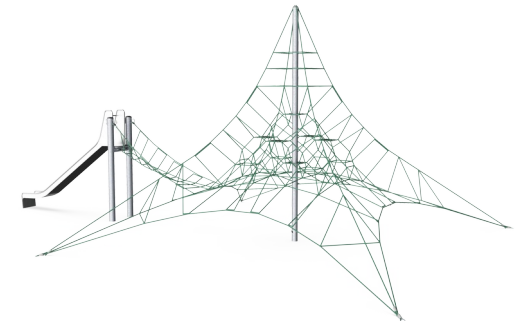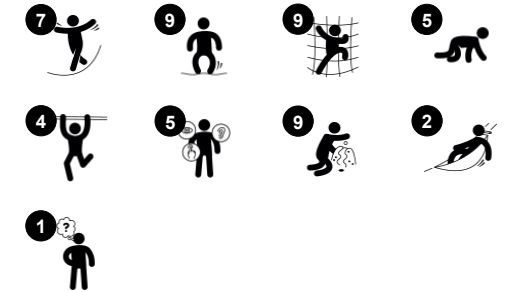

The Macro Spacenet with extensions encourages children to climb, again and again. The feeling of achievement when having climbed to the top is phenomenal. Climbing or swaying on the bouncy pendulum seats trains the motor skills' ABC: Agility, Balance and Coordination. Major muscle groups get used when children climb in the Macro Spacenet. All

these physical skills are fundamental and can help with children's ability to sit still and concentrate. The slide is a great way down, making an irresistible loop of climbing up and sliding down, training turn taking, too. The rope trails are nice destinations for a break and stimulate children's social-emotional skills, such as courage and self regulation.

Macro Spacenet & Slide

COR102902

Corocord ropes with 19mm diameter or more are special 'Hercules' - type with galvanized six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.

Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope structures.


In the center of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favorable and equalizes the oscillations in the net. The masts are hot dip galvanized as standard, with the design option of additional powder coating.

The spacenets' main bearing ropes are equipped with an additional safety feature: should the main connections fail, the safety rope prevents collapse of the structure.

Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.

For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.

Item no. COR102902-1103	
Installation Information	
Max. fall height	0 cm
Safety surfacing area	0,0 m ²
Number of installers	2
Total installation time	21,1
Excavation volume	9,93 m ³
Concrete volume	6,32 m ³
Footing depth (standard)	110 cm
Shipment weight	940 kg
Anchoring options	Surface ✓ In-ground ✓
Warranty Information	
Corocord Rope	10 years
S-Clamps	10 years
Aluminum clamps	10 years
Membrane	2 years
Spare parts guaranteed	10 years

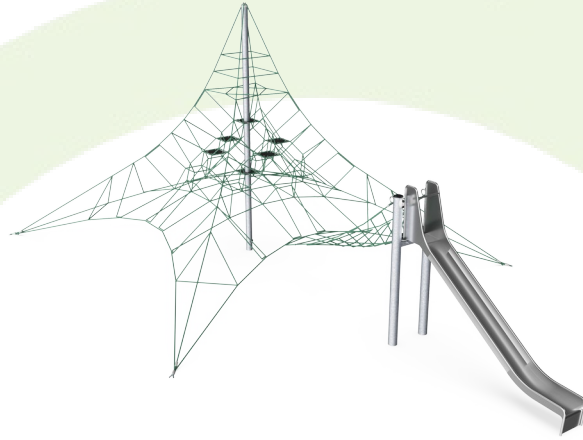

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR102902-1103	2.294,30	3,21	36,70

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Validation of CO₂ calculation of: Corocord



Data version no. 2021-09-27

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 15. October 2021 | Valid until: 15. October 2023

Validated by:

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO₂ calculation of 8 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

Publication date: 15. October 2021

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000



Macro Spacenet & Slide

COR102902

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)