

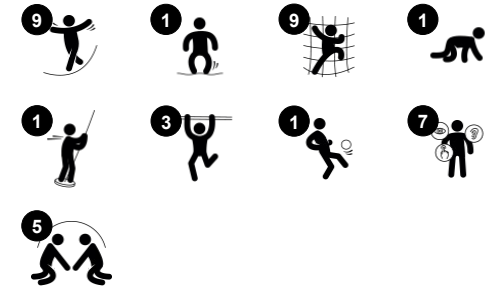


# Up and Down Trail

COR20820




| Item no. COR208201-0901     |   |
|-----------------------------|---|
| General Product Information |   |
| Dimensions LxWxH            | 754x214x220 cm  |
| Age group                   | 3+  |
| Play capacity (users)       | 9   |
| Color options               |  |

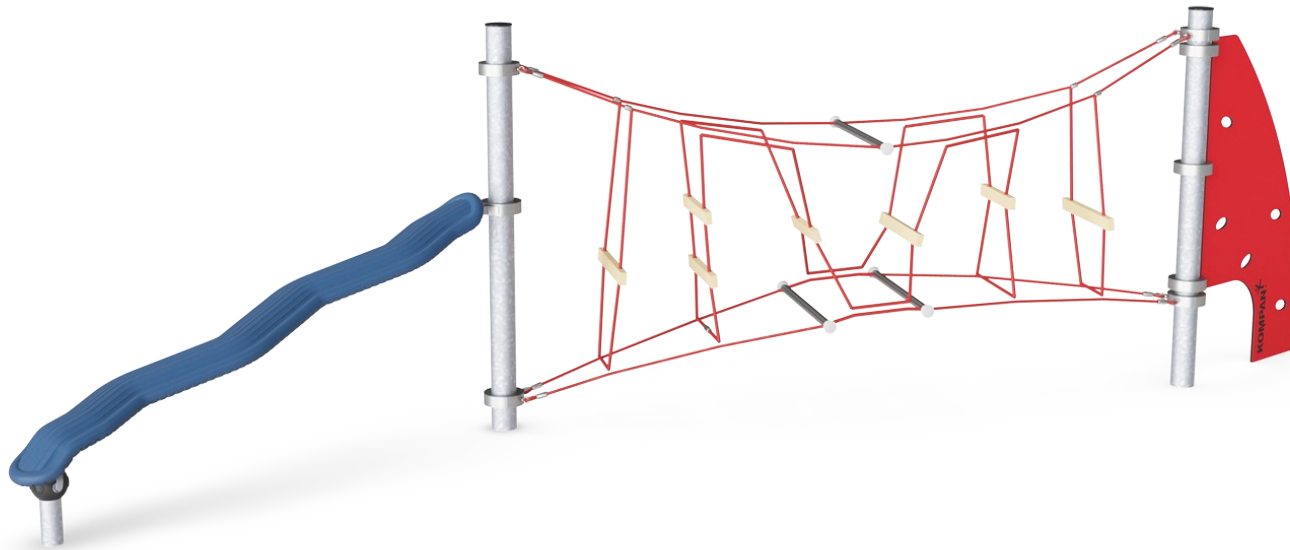

The Up and Down Trail is a great beginners' trim trail with immense appeal for toddlers and younger children. Many children can play at once on the UFO trail due to the intelligent, transparent design allowing children to interact socially through the piece. The wide variation of horizontal climbing supports allow for varying levels of ability and courage. They offer a

bouncy break, seated or hanging, too. The climbing wall can be used from both sides, supporting parallel play. The challenging Rocking Tube offers older players rich training of coordination and muscles. All the bouncy climbing immensely trains the balance, coordination and spatial awareness. These are fundamental motor skills used when e.g. sitting

still or navigating traffic in streets securely.

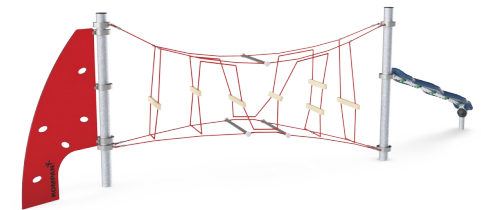

# Up and Down Trail


COR20820



Corocord 16mm ropes are special 'Hercules'-type with galvanised four-stranded steel wires and a steel wire core. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

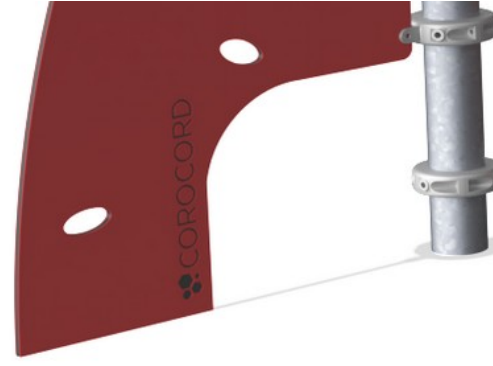

Panel of 19mm EcoCore™ HDPE. This highly durable, eco-friendly material is not only recyclable after use, but also consists of a core produced from 100% recycled material.

| Item no. COR208201-0901  |                     |
|--------------------------|---------------------|
| Installation Information |                     |
| Max. fall height         | 200 cm              |
| Safety surfacing area    | 37.4 m <sup>2</sup> |
| Total installation time  | 11.8                |
| Excavation volume        | 4.10 m <sup>3</sup> |
| Concrete volume          | 2.87 m <sup>3</sup> |
| Footing depth (standard) | 100 cm              |
| Shipment weight          | 416 kg              |
| Anchoring options        | In-ground ✓         |
| Warranty Information     |                     |




The steel structure are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Corocord aluminium clamps are used as connectors between steel posts and rope. Two aluminium castings are bolted together. The height of the clamps is thus variable.



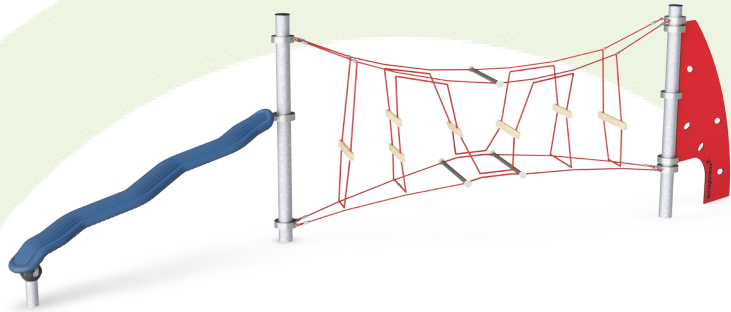

| Cradle to Gate A1-A3  | Total CO <sub>2</sub> emission | CO <sub>2</sub> e/kg    | Recycled materials |
|-----------------------|--------------------------------|-------------------------|--------------------|
|                       | kg CO <sub>2</sub> e           | kg CO <sub>2</sub> e/kg | %                  |
| <b>COR208201-0901</b> | 986.40                         | 3.27                    | 42.80              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



### Validation of CO<sub>2</sub> calculation of: Corocord



Data version no. 2021-09-27

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 15. October 2021 | Valid until: 15. October 2023**

**Validated by:**

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO<sub>2</sub> calculation of 8 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

**Publication date: 15. October 2021**

**By Bureau Veritas HSE**  
 www.bureauveritas.dk  
 +45 7731 1000




# Up and Down Trail


COR20820

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

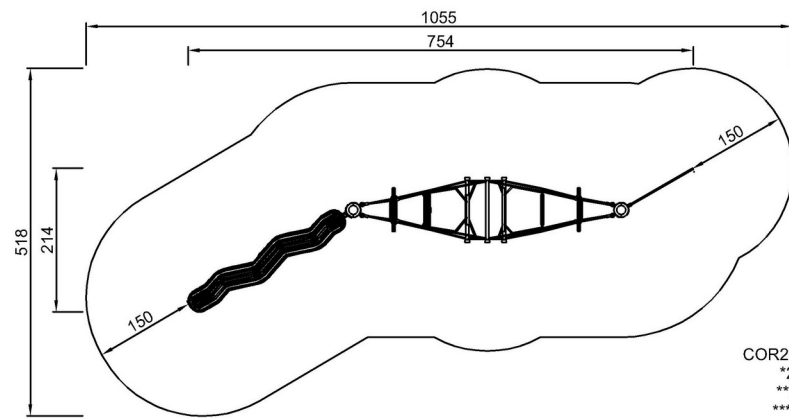

COR208201-xx01  
\*200cm  
\*\*220cm  
\*\*\*37.4m<sup>2</sup>

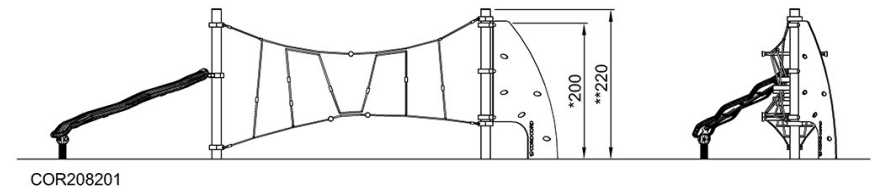

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)