

Cross Trainer

KPX125



Item no. KPX125-3617	
General Product Information	
Dimensions LxWxH	153x65x184 cm
Age group	13+
Play capacity (users)	1
Colour options	● ●

The Cross Trainer is perfect for those looking to improve their fitness level. During the workout you will experience a mild resistance only, making it easy on knees and joints while still providing optimal exercise. The Cross Trainer works a large portion of body muscles and builds cardiovascular fitness. Regular users will develop their body composition,

health and gain an increased quality of life through steadily improving fitness levels. The user can adjust the intensity of the exercise by changing the rate of their pace. A higher amount of rotations per minute will lead to a higher intensity.



Cross Trainer

KPX125



For ensuring the integrity of the main frame the support post is made of a hot-dip galvanized steel tube of $\varnothing 159\text{mm}$, with a wall thickness of 4mm and has a post cap made of powder-coated aluminium.



The sign consists of a 1.5mm aluminium plate with serigraphy print, sealed by a subsequent anodizing process, screwed on to a machined plate of 19mm EcoCore™.



The frame and moving steel parts are constructed of hot-dip galvanized steel tube's $\varnothing 60,3\text{mm} \times 3,2\text{mm}$, $\varnothing 38\text{mm} \times 4\text{mm}$ and squared tube $60 \times 30 \times 3\text{mm}$. All moving connections have a stainless steel AISI 304 shaft and two ball bearings.



Wheel cover is made of vacuum formed RPC (Recycled Polycarbonate). This is a very strong and sustainable way of creating nicely designed products like the wheel cover.



Seats of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.



End caps are made of injection molded PA6 (polyamide - Nylon). A great protection to all conditions.

Item no. KPX125-3617

Installation Information

Max. fall height	55 cm
Safety surfacing area	7,5 m ²
Total installation time	4,9
Excavation volume	0,60 m ³
Concrete volume	0,38 m ³
Footing depth (standard)	82 cm
Shipment weight	149 kg
Anchoring options	In-ground ✓ Surface ✓

Warranty Information

Hot dip galvanized steel	Lifetime
Hollow PE Parts	10 years
EcoCore HDPE	Lifetime
Bearing construction	5 years
Spare parts guaranteed	10 years



Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
KPX125-3617	329,20	2,66	50,00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Validation of CO₂ calculation of: Fitness



Data version no. 2021-09-27

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900 (Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 15. October 2021 | Valid until: 15. October 2023

Validated by:

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO₂ calculation of 8 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

Publication date: 15. October 2021

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000




Cross Trainer


KPX125

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

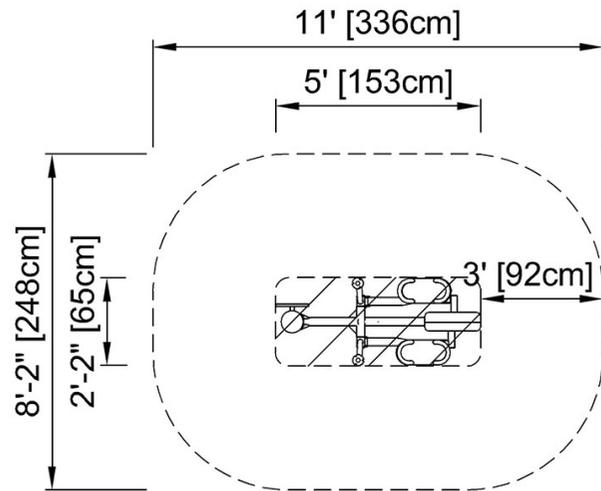

KPX125
* 1'-10" / 55cm
** 6' / 184cm
*** 81ft² / 7.5m²

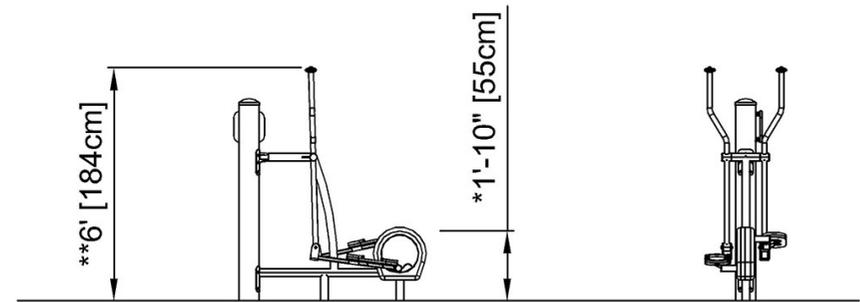

KPX125-xx17

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)