


# Climby Shifter

M7021



Item no. M702104-3417P	
General Product Information	
Dimensions LxWxH	183x245x217 cm
Age group	3+
Play capacity (users)	7
Color options	

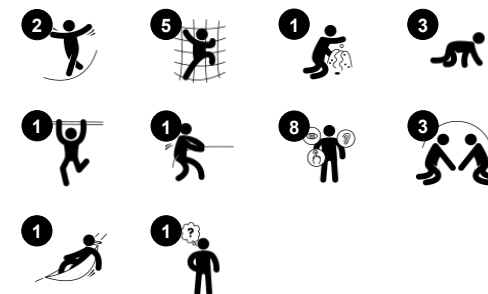

The whimsical Climby Shifter appeals to children's curiosity and makes them come back again and again. The variation of climbing and crawling is intense, with easier and harder climbs to choose from. The sense of wonder is at work thanks to the conscious panel colour use: children climb from red or yellow into a new combination of colours. The inclined

ground panel additionally challenges the senses of balance and proprioception. This makes climbing the Climby Shifter great training for the motor skills and muscles: their cross-coordination and sense of balance need to be on the alert. The wide platforms of the Climby Shifter invite breaks and offer roomy resting points for children. Thanks to the three

panels, children can always find shelter from the wind or the sun. Please notice the fine climbing studs, added to support the whole unit.



# Climby Shifter

M7021



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled post consumer material from food packing waste.



Foot support is made of HPL with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

Item no. M702104-3417P

### Installation Information

Max. fall height	139 cm
Safety surfacing area	20.3 m <sup>2</sup>
Total installation time	8.6
Excavation volume	1.09 m <sup>3</sup>
Concrete volume	0.18 m <sup>3</sup>
Footing depth (standard)	63 cm
Shipment weight	288 kg
Anchoring options	In-ground ✓ Surface ✓

### Warranty Information



Play activities like the turning ball is made of injection moulded high quality UV-stabilised nylon (PA6). PA6 has good wearing and impact strength.



Ropes are made of UV-stabilised PA with inner steel cable reinforcement. The rope is induction treated in order to create a strong connection between steel and rope which leads to good wear resistance.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor such as EcoCore™ panels of 100% post consumer recycled ocean waste.






Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
M702104-3417P	447.80	2.17	43.10
M702106-3417P	422.60	2.05	47.60

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



### Validation of CO<sub>2</sub> calculation of: Themed play systems

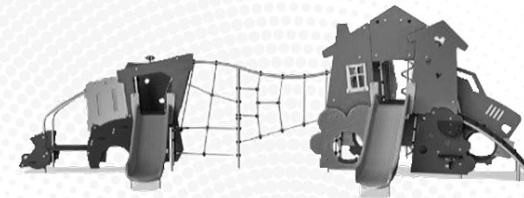

Data version no. 2021-09-27

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Themed play systems" represented by item no.: MSC641100-3717P.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 15. October 2021 | Valid until: 15. October 2023**

**Validated by:**

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO<sub>2</sub> calculation of 8 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

**Publication date: 15. October 2021**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000




# Climby Shifter


M7021

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

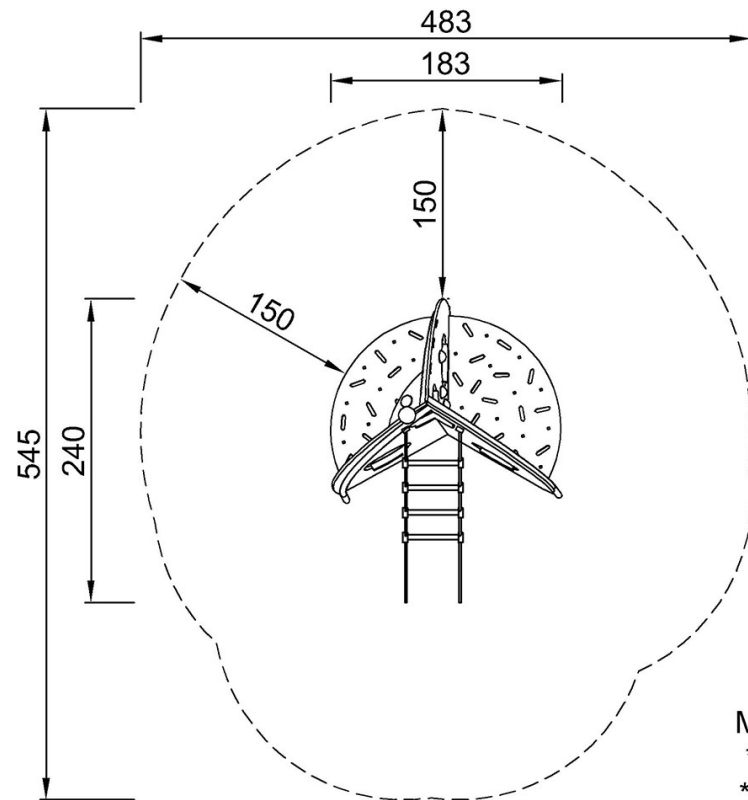

M702106  
\*139cm  
\*\*217cm  
\*\*\*20.3m<sup>2</sup>

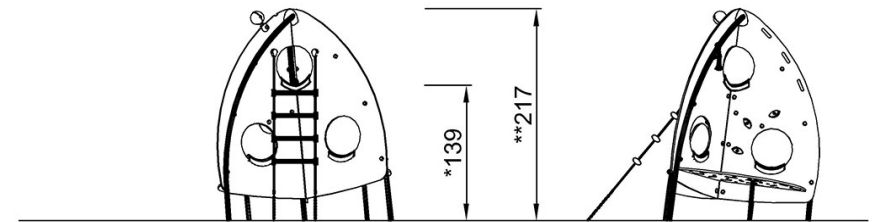

M702106

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)